


Expansion module for L-CON-LOG series. 4 x Analog inputs, 2 x Analog Output, Digital input 4 x, 4 x Digital output

### FEATURES

- Multifunction concealed board with 4 x AI, AO x 2, 4 x DI, 4 XDO individual channel configuration
- Jumper selectable voltage- or current input
- Broken kabeldetektion by current measurement
- Configurable settings for the initial value
- digital input channels can be used as 32-bit counters
- 120 VDC surge protection to the analog input
- 60 VDC surge protection for digital input
- Overload protection for digital output
- Short circuit protection for digital output

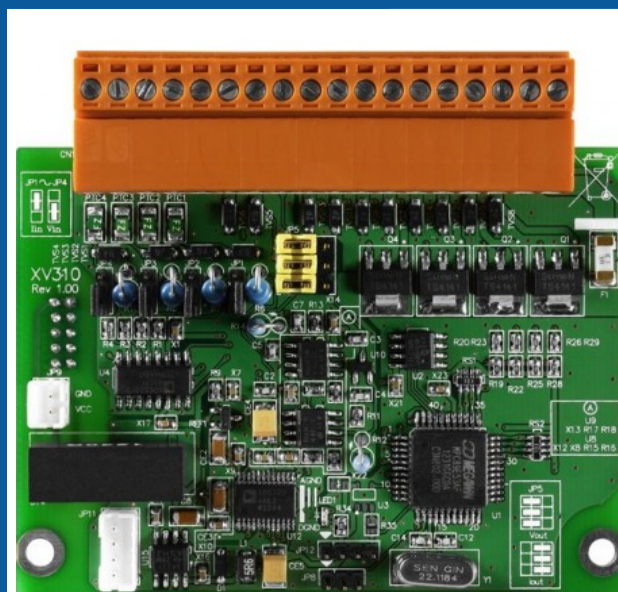

**SPECIFICATIONS**

|         |   |                                                                                                             |
|---------|---|-------------------------------------------------------------------------------------------------------------|
| Indgang | : | 4 stk. $\pm 1$ V, $\pm 2.5$ V, $\pm 5$ V, $\pm 10$ V, $\pm 20$ mA, 0 ~ 20 mA, 4 ~ 20 mA (Jumper Selectable) |
| Indgang | : | 4 stk. kontakt ( slutte )                                                                                   |
| Udgange | : | 2 stk. 0 V ~ +5 V, $\pm 5$ V, 0 V ~ +10 V, $\pm 10$ V, 0 mA ~ +20 mA, +4 mA ~ +20 mA (Jumper Selectable)    |
| Udgange | : | 4 stk. 650mA maks. 10 til 40 volt Open collector                                                            |

