


GSM Alarm controller with alarm via SMS. 6 x analog input v / 0-20mA, 8 x digital input 4 x relay output, APP, 4G

### FEATURES

- 8 x digital inputs NC / NO Type
- 6 x analog inputs. 12 Bit resolution, 0-5V, 4-20mA or 0 - 20mA
- 4 x Relay outputs 5A / 30VDC, 5A / 250VAC
- 1 x USB port
- GSM 3G 4G
- 9-36VDC (12V / 300mA)
- Backup Battery 3.7v 1200mAh
- Operating temperature -10- + 70 °C
- Adapted SMS Alarm Messages
- APP for iOS and Android

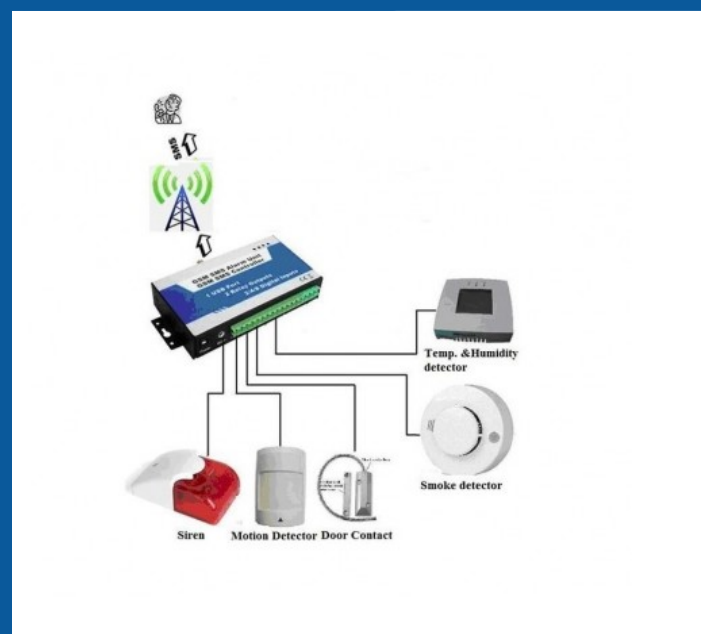

**SPECIFICATIONS**

|                 |   |                                                                  |
|-----------------|---|------------------------------------------------------------------|
| Operating Temp. | : | -10 til +70 °C                                                   |
| Forsyning       | : | 9 - 36VDC                                                        |
| Indgang         | : | 8 x +3~30V                                                       |
| Indgang         | : | T/H til måling af fugt( 0~100%RH) og temperatur(-40°C til +80°C) |
| Porte           | : | 1 x USB Port, 1 x RS485                                          |
| Relæ            | : | 4 x 5A/30VDC/250VAC                                              |
| SIM kort        | : | 1 x 3G/GSM 850/900/1800/1900Mhz                                  |

