IP / PTZ camera keyboard with 4D joystick
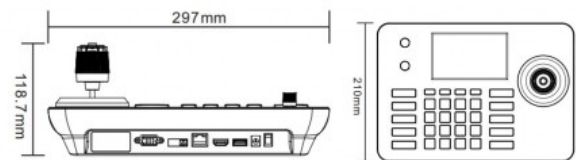
FEATURES

Network control with independent IP address
Support for ONVIF
5 inch Industrial LCD screen
Resolution 800*480, Image Decoding, Real-time Monitoring
4D Joystick Control PTZ Function
Preset patrol pattern and AB scanning
Web setting
Button for zoom and control speed
PoE

SPECIFICATIONS

Operating Temp.	:	-10 °C ~ 55 °C
Andet	:	up to 999 IP cameras
Indgang	:	RS422 (Reserved), RS232 (Development port), RJ45
LCD	:	TFT LCD 800*480
Opløsning	:	1 channel: 1920 x 1080
Protokol	:	Onvif
Strømforsyning	:	DC12V/2A, ≤5W
Dimensioner	:	297mm x 210mm x 118.7mm