


Adlink PCI7260+ACL-10337. 8 kanalers relæ output, 8 isolerede digitale input, PCI

## FEATURES

- PCI kort med 8 relæer og 8 optoisolerede indgange
- 8-CH high power relay outputs (5A @ 250VAC or 30VDC)
- 8-CH isolated digital inputs with AC-filter
- 1-CH emergency shutdown input
- Pluggable connector for high current input
- Supports universal 32-bit 3.3V and 5V PCI bus
- Initial state and safety state setting by DIP switches
- Built-in watchdog timer

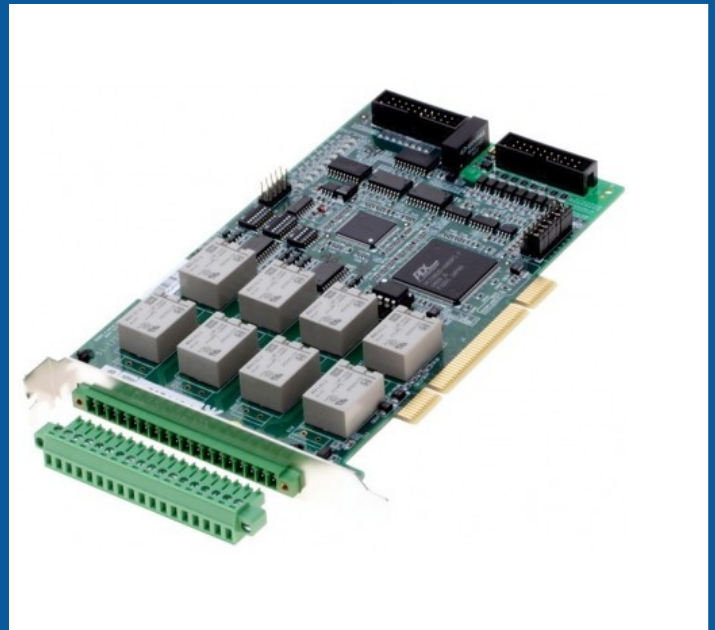

## SPECIFICATIONS

Indgang	:	8 optoisolerede (PC-3H4), fælles stel (minus) Logisk 0: 0 - 2 VDC Logisk 1: 5 - 24 VDC ndgangsniveau: ikke polariseret
Indgangsimpedans	:	4,7 K $\Omega$
Isolation	:	2.500 VDC
Software	:	Drivere til DOS, Windows 2000, XP, Win7 og Win8samt Labview og Linux medfølger
Stik	:	Skrueterminal som kan afmonteres
Udgange	:	8 skifterelæer ("klæbe-relæer") Belastning: 250 VAC 5 A eller 30 VDC 5 A Skiftetid: typisk 10 ms

