


21,5" panel-PC ATEX/IECEX Zone2, Zone22 og C1D2/C2D2/C3-sertifisert Intel N2930

FEATURES

- 21,5" TFT-LCD
- Intel Celeron-prosessor N2930
- 8 GB DDR3L ombord
- 1 x 128 GB 2,5" MLC SSD montert
- 1 x 64 GB mSATA MLC SSD montert
- 316 rustfritt stål chassis
- Total IP66 klasse med M12 vanntett kontakt
- En rekke IO-applikasjoner
- Bredt område DC 9~36V strøminngang
- Støttepanelfeste og VESA-feste
- Støtt prosjektert kapasitiv berøring
- Full flat ramme og vifteløs design
- ATEX/IECEX Zone2, Zone22 og C1D2/C2D2/C3-sertifisert

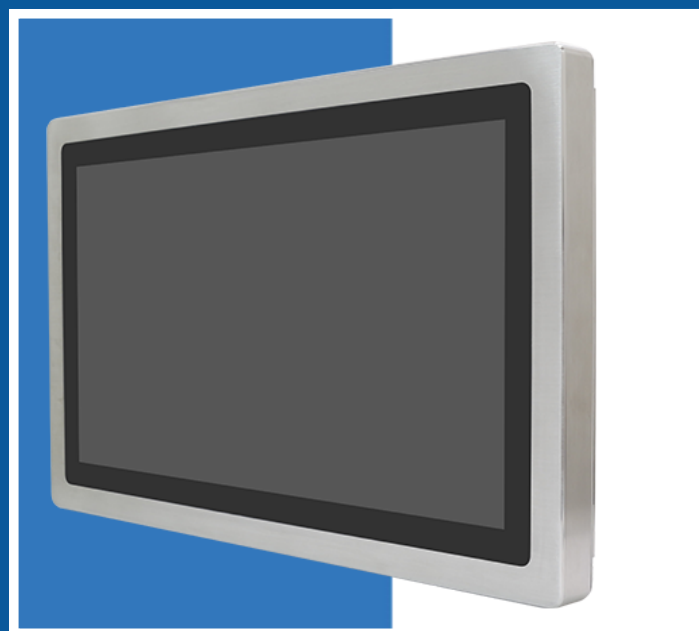

SPECIFICATIONS

CPU	:	Intel Celeron N2930 Processor (2M Cache, 1.83GHz)
Chipset	:	soc
USB	:	1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain
Driftstemperatur	:	-20~60°C
Antal farver	:	16.7 M
Ethernet	:	1 x M12 8-pin for LAN with waterproof cover and chain
Forsyning	:	DC 9~36V, 1 x M12 3-pin for DC power connector with waterproof cover and chain
Hukommelse	:	Onboard 4GB/8GB DDR3L 1333MHz
IP-Tæthed	:	IP66 total
Kontrast	:	3000:1
LCD	:	21.5"
Luftfugtighed	:	10 to 95% @ 40C, non-condensing



SPECIFICATIONS

Montering	:	Vesa mount, OPTION!: Panel mount
Msata	:	1 x mSATA
Mål og vægt	:	12.6Kg
OS SUPPORT	:	Windows embedded 7 Windows embedded 8.1 Windows 10 IoT ENT LTSP
Porte	:	1 x M12 8-pin for COM1, RS232/422/485, Default RS232, with waterproff cover and chain
Skærm	:	1920 x 1080
Strømforbrug	:	35 Watt
Touch	:	Projected Capacitive Touch, USB, Light transmission 90%
Udgange	:	1xM12 8-pin for VGA with waterproff cover and chain
VESA standard	:	Vesa mount 100x100
Dimensioner	:	571x362x75.1mm

