


FAV250

Vejecelle 250 kg

FEATURES

Single point celle m/M8 x 2,5 gevind; Fuld belastning=250 Kg

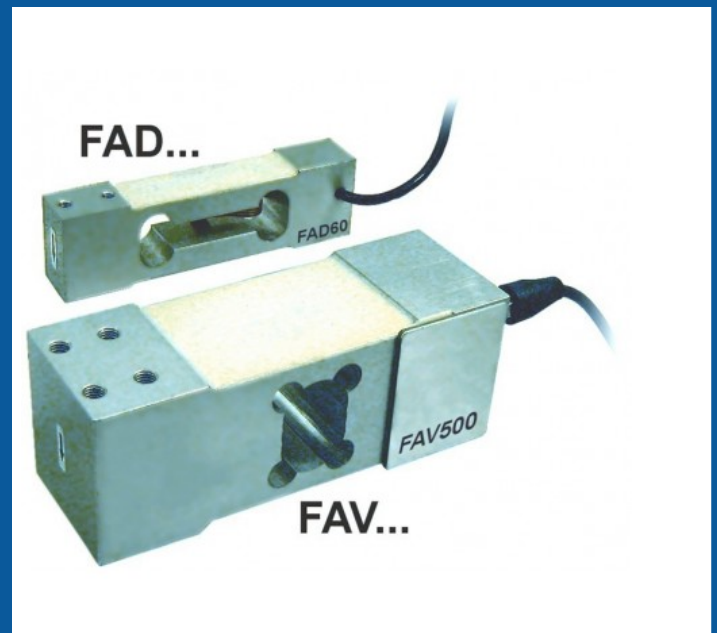

Danbit A/S Schous plass 1 Oslo, N-0552
Norway



67 104 460



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.

SPECIFICATIONS

Fuld belastning	:	250 Kg
Hysterese	:	0,02 % af nominelt output
Materiale	:	Aluminium
Nominelt output ved fuld belastning	:	2 mV/V $\pm$ 1 %
Dimensioner	:	175 mm (L)

